



Instruction Manual SOUND SYSTEM

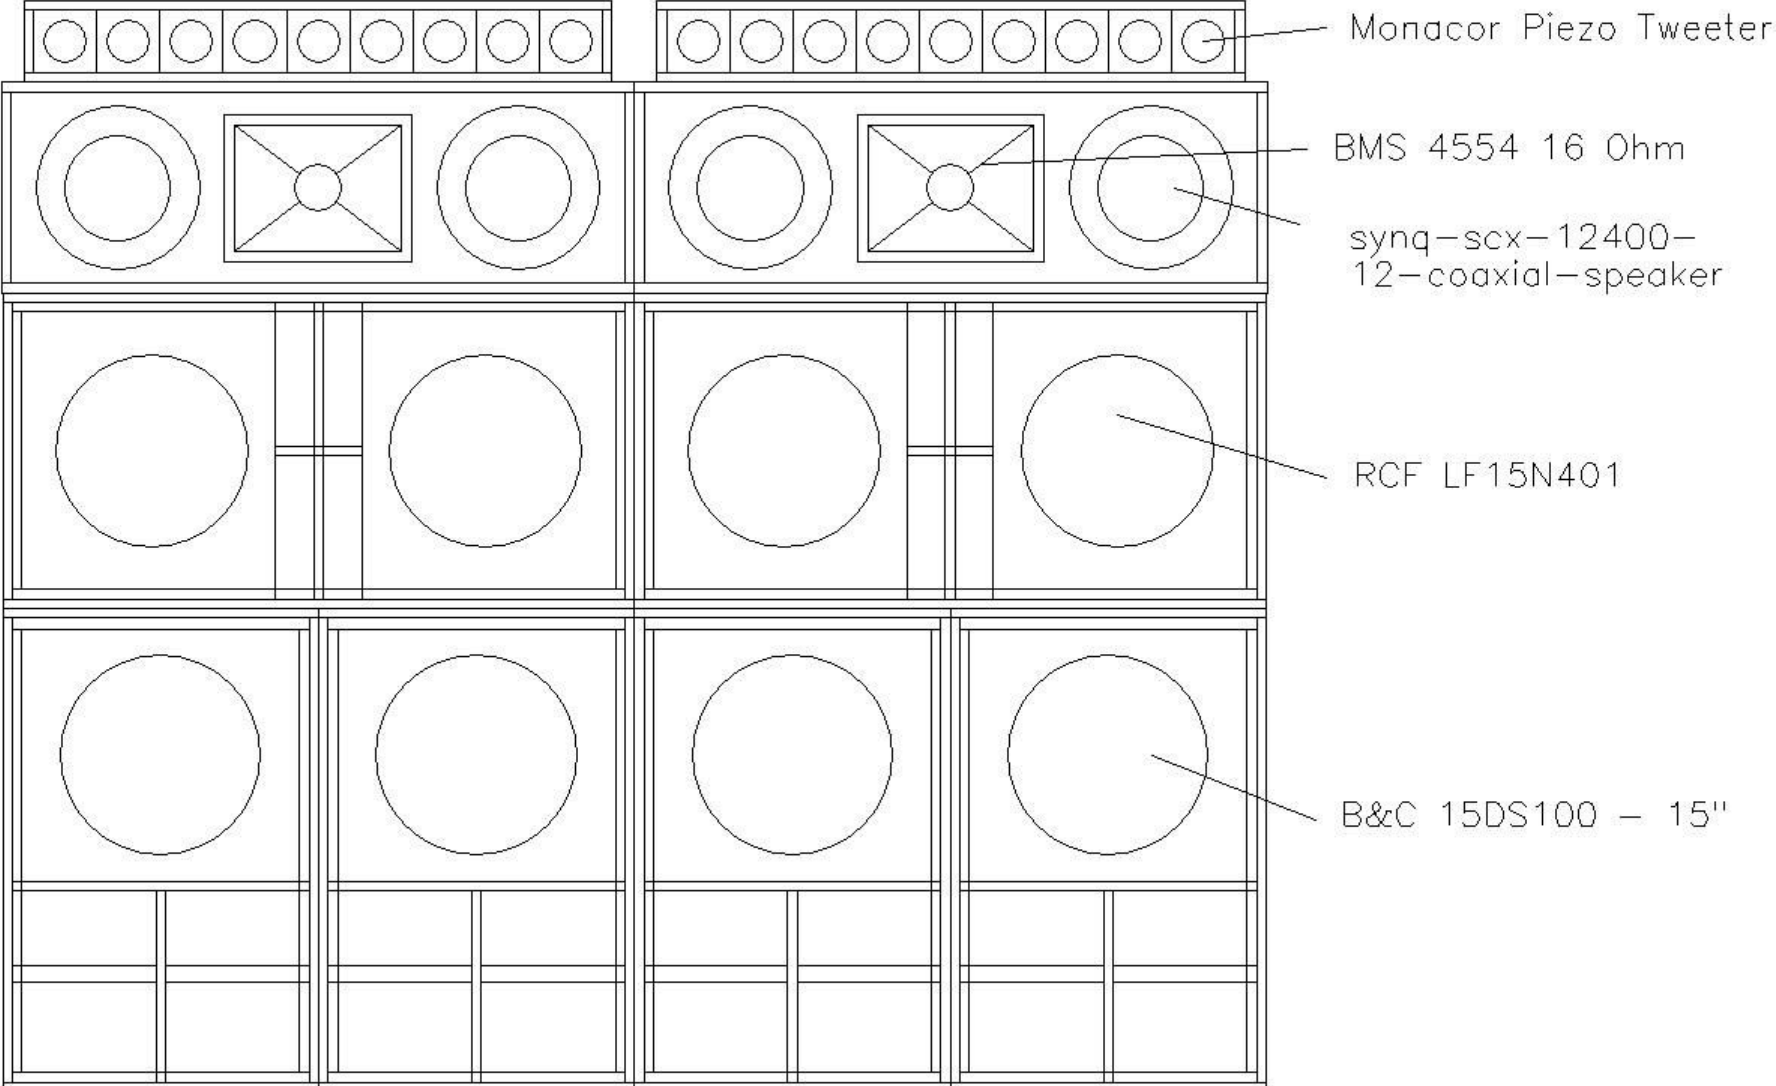

Speaker cable connections

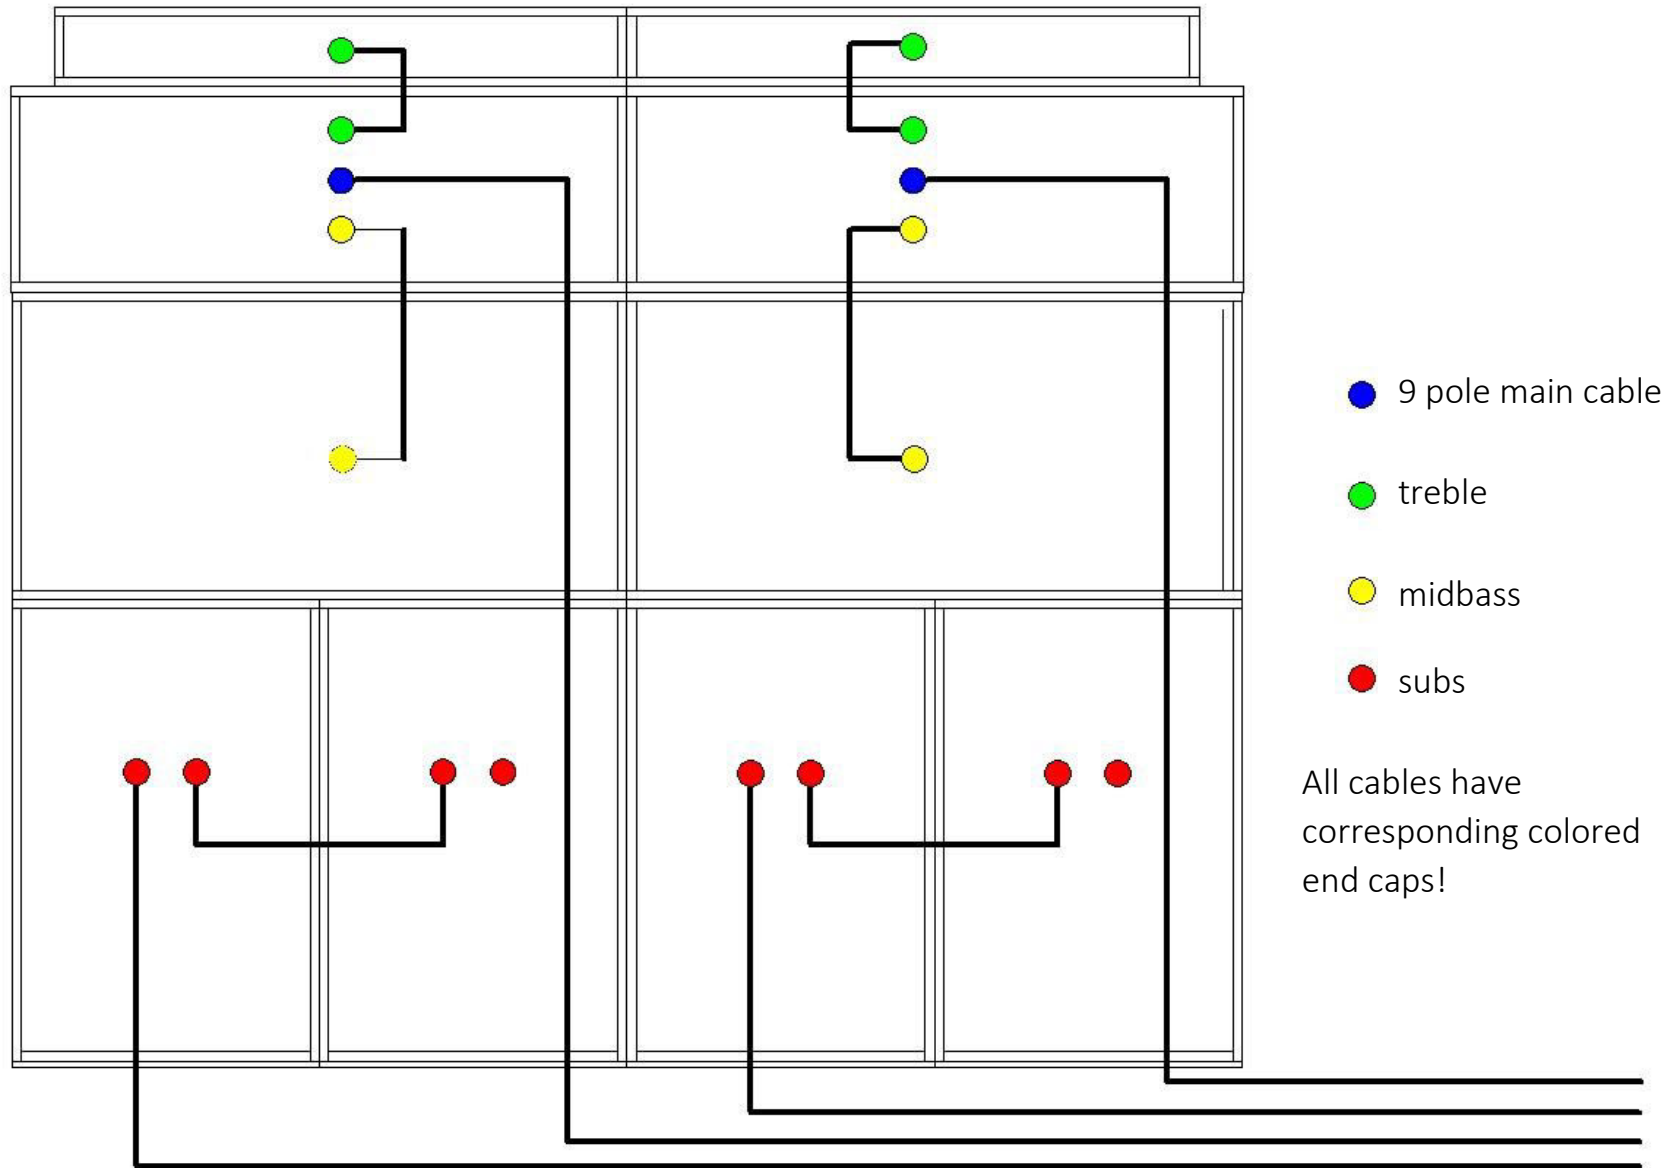

Rack 1 back



Loudspeaker out
Blue plugs
Tweeter, Horn, Mid,
Kickbass Multicore

DSP control

From mixer

Line out to sub
Power amplifier rack 2


Rack 2 (subwoofer and power distribution)

Sub out
Red plugs

Sub line in
Sym jack

Power supply
Rack 1

Power supply
mixing console, small appliances

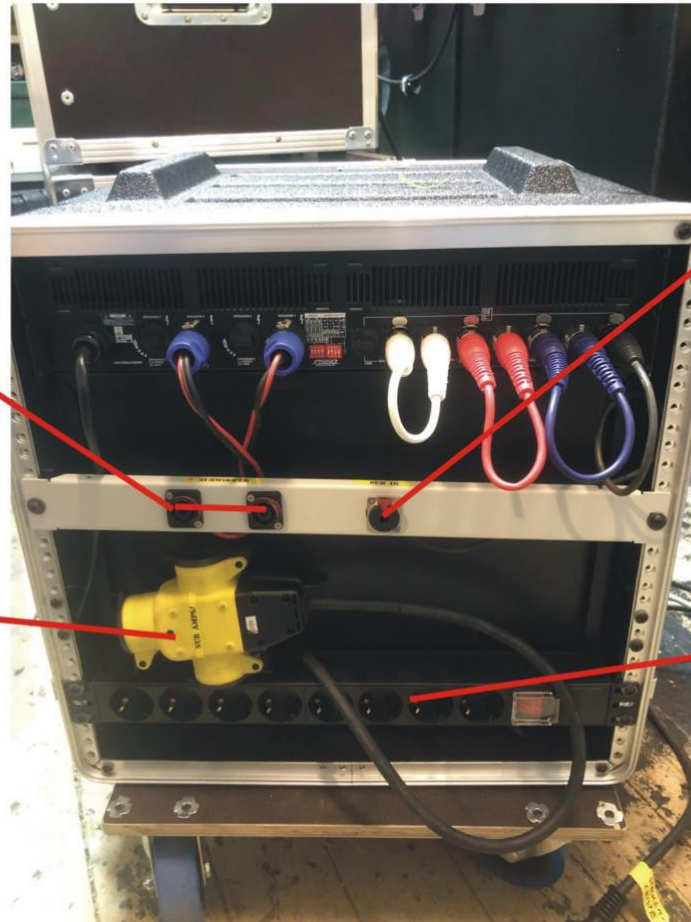

Assembly instructions:

Speaker tower

Select the space for the speaker tower(s) to match the speaker cable length.

First place the two pallets on the designated space and lay out the tensioning strap underneath.

Place the tower as shown on the first page.

Plug in the speaker cables according to the wiring diagram and lay them in the direction of the amp racks (at the console). The L-cables are located in the large drawer in rack 2.

Then place the tension strap over the speaker tower and tie everything down properly!

Amp/mixer racks

Set up the racks on the stage, possibly even on a small platform (easy access)

Wire according to the plan.

Connect the mixer, the line cables and accessories are in the drawer under the mixer.

16A connection is on the front of rack 1.

First switch on the peripheral devices, then the amplifiers!

Make sure that all amps are set to zero beforehand!

Turn up the mixer to a reasonable level

Turn the amplifier up to the mark.

Dismantling

When dismantling, please always turn down the amplifiers first, possibly leave them running for a few minutes to cool down.

Please put all cables back in the drawers from where they were taken!

My tip: First collect the cables and pack them away properly, then dismantle the rest.

Good luck